


Power Harrow



- Wide range of models
- Strong, solid and durable body structure
- Long-lasting blades
- A widespread and experienced service network
- Easy to find of spare parts
- Warranty for 2 years

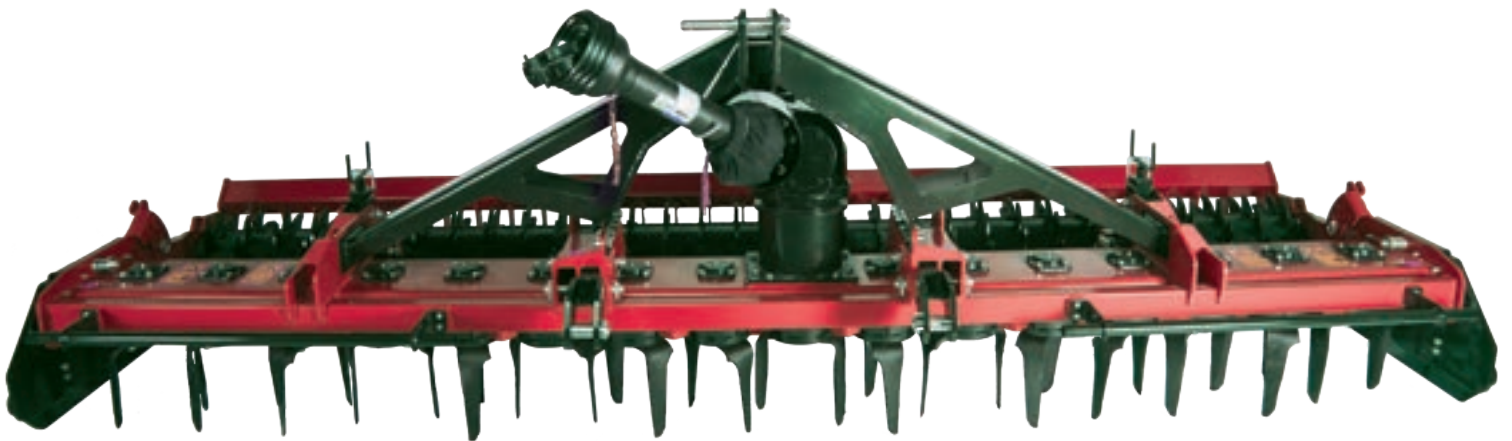

 facebook.com/ArmaTrac/
 twitter.com/armatrac
 instagram.com/armatrac_
 tr.linkedin.com/company/armatrac



ArmaTrac®

Armed Well, Even For The Toughest Job.

ARMATRAC Power Harrow

● Thanks to the friction clutch system used in upright models, sudden loads from the tractor during transmission of the tailpipe are prevented from damaging the transmission. Long-lasting and safe operation is provided at this vault.


● It has a strong body structure and is resistant to harsh soil conditions.



With its adjustable depth feature, it is designed to process the soil to the required depth and prepare the most suitable seed bed.

TECHNICAL SPECIFICATIONS	—		⤵	⤴	⤵	⤴
MODEL	WORKING WIDTH	WORKING DEPTH	NUMBER OF BLADE & FLANGE	POWER REQUIREMENT (HP)	WEIGHT (KG)	MACHINE DIMENSIONS (WIDTH x LENGTH x HEIGHT) (CM)
200 POWER HARROW	200	28	16 / 8	50 - 70	1000	146 x 231 x 125
250 POWER HARROW	250	28	20 / 10	70 - 90	1050	146 x 280 x 125
300 POWER HARROW	300	28	24 / 12	90 - 120	1350	146 x 306 x 125
350 POWER HARROW	350	28	28 / 14	120 - 150	1530	146 x 356 x 125
400 POWER HARROW	400	28	32 / 16	150 - 180	1610	146 x 406 x 125
HYDRAULIC SHIFT ATTACHMENT	-	-	-	-	120	-

*ArmaTrac has the right to change the machines without prior notice and without changing the machines sold before.

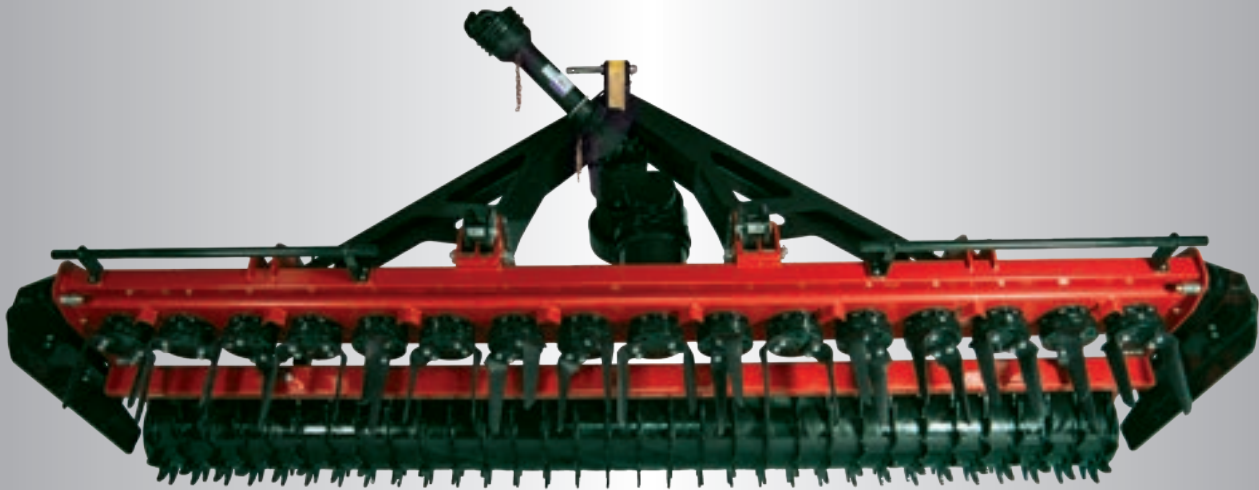

The packer rollers provided in the upright rotovators prevent the soil from accumulating between the teeth by means of the strippers on them. The working depth of the rotator is easily adjusted by pin system located on the side arms of the roller.

